



Specifications

Display	4.3-Inch Touch Screen
Face capacity	3,000
Fingerprint capacity	4,000
Card capacity	10,000 (optional)
Logs capacity	100,000
Communication	TCP/IP, USB Host, RS485, WiFi(Optional)
Standard Functions	Automatic Status Switch, Self-Service Query, Work Code, SMS, DST, T9 Input, 9 Digit User ID, Scheduled Bell, Photo ID
Interfaces for Access Control	3rd Party Electric Lock, Door Sensor, Exit Button, Alarm
Wiegand Signal	Output
Optional Functions	ID/MiFare Card, Wi-Fi, 3G, ADMS, 200 mAH Backup Battery
Power Supply	12V 3A
Operating Temperature	0 °C- 45 °C
Operating Humidity	20%-80%
Dimensions	193.6*165.2*86mm (Length*Width*Thickness)
Package Weight	1.6 kg

Configuration

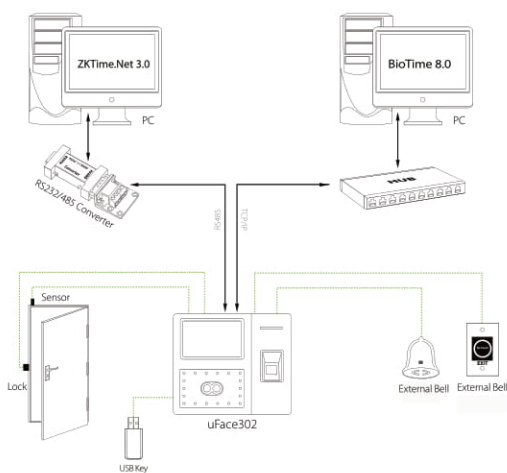


What's in the Box



uFace302



Back Plate



Power Adapter



Lines for Access Control Interface



Mounting Paper



Screws and Holders



Screw Driver



Paper ruler



iFace 302

Multi-Biometric T&A and Access Control Terminal



ZKTeco has released the iFace302 Multi-Biometric T&A and Access Control Terminal which supports 3,000 face templates, 4,000 fingerprint templates and 10,000 cards (optional). It is equipped with ZKTeco latest hardware platform and algorithm, which provide clients with a brand new UI and user-friendly operating interface, bringing them a smooth using experience. With the advanced face algorithm and multi-biometric verification technology, the terminal's security level of verification is greatly enhanced.

Features

- 3,000 face and 4,000 fingerprint templates
- Multi-languages
- High verification speed
- Advanced and user-friendly UI
- Chip encryption for firmware protection
- Optional built-in battery backup providing approximately 4 hours of continuous operation
- Easy to extend functions and customize client's requirements
- One face template is registered for one user only
- Able to detect whether the face is an actual face or a photo, enhancing the security level of verification